



HEX5 BSM415M10-54HPH

182

BLACK MONO-FACIAL PERC 400W - 420W
EFFICIENCY UP TO 21.48%

Made In Vietnam

- Long Beach Stock
- US Local Service
- Best Residential Selling

- . Dimensions: 1724*1134*35mm
- . Weight: 22.0kg
- . Max. System Voltage: 1000V/1500 V (IEC/UL)

GREAT PERFORMANCE AND RELIABILITY

- ★ The multi-busbar half-cut technology
- ★ Certified in TUV salt spray, ammonia corrosion
- ★ 2400Pa wind load and 5400Pa snow load testing
- ★ Effectively reducing BOS costs to achieve lower LCOE
- ★ First-year degradation is less than 2.0%
- ★ Low hot-spot & micro crack risk



PERFORMANCE WARRANTY

- 12** Years Enhanced Product Warranty on Materials and Workmanship
- 25** Years Linear Power Performance Warranty According to the applicable Bluesun Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems

PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730



BLUESUN SOLAR CO.,LTD

Add: 1499 Zhenxing Road, Shushan District, 230031 Hefei, China
Tel: +86 (158) 5821 3997 Fax: +86 (551) 6565 2651
E-mail: info@bluesunpv.com Http://www.bluesunpv.com

US Warehouse Location: Long Beach, CA

Electrical Data (STC)

Maximum Power (Pmax/W)	400	405	410	415	420
Operating Voltage (Vmp/V)	36.96	37.11	37.26	37.41	37.56
Short Circuit Current (Isc/A)	13.60	13.70	13.79	13.89	13.98
Voltage at Maximum Power (Vmp/V)	31.00	31.15	31.30	31.45	31.60
Current at Maximum Power (Imp/A)	12.91	13.01	13.10	13.20	13.30
Module Efficiency ηm(%)	20.46	20.72	20.97	21.23	21.48

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, AM1.5 Operating Temperature:-40°C~+85°C

Electrical Data (NMOT)

Maximum Power (Pmax/W)	300	304	308	312	316
Operating Voltage (Vmp/V)	33.97	34.12	34.27	34.42	34.57
Short Circuit Current (Isc/A)	11.10	11.18	11.27	11.35	11.43
Voltage at Maximum Power (Vmp/V)	28.19	28.34	28.49	28.64	28.79
Current at Maximum Power (Imp/A)	10.65	10.73	10.82	10.90	10.98


NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20 °C, AM1.5, Wind Speed 1m/s.

Mechanical Data

Cell Type	182×91mm Mono
Cell Orientation	108(6×18)
Module Dimensions	1724×1134×35mm
Weight	22.0kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film(Black)
Frame Material	Anodized aluminum alloy(Black)
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector

I-V CURVE


Current-Voltage Curve(420W)

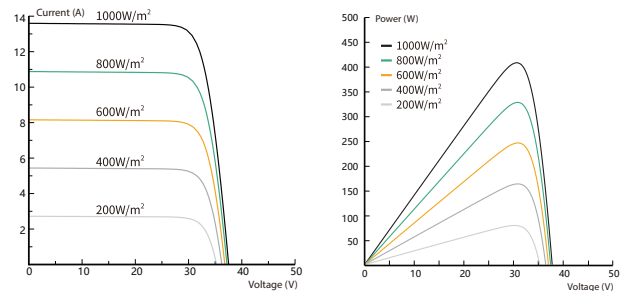

TECHNICAL DRAWINGS

Temperature Coefficient (Pm)	-0.340%/ °C
Temperature Coefficient (Voc)	-0.270%/ °C
Temperature Coefficient (Isc)	0.048%/ °C
NMOT (Nominal Module Operating Temperature)	41±3 °C

Module Dimensions (mm)

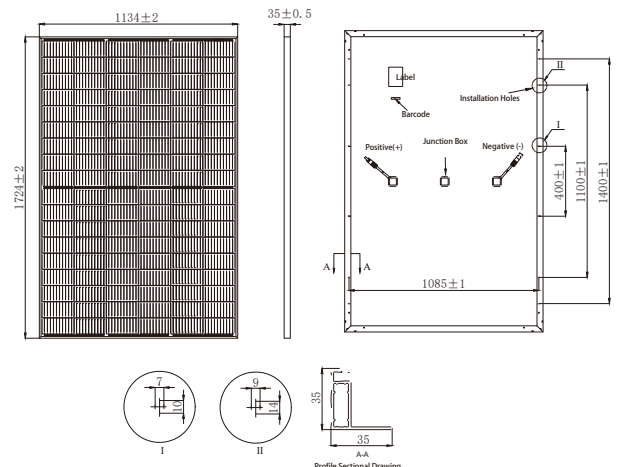

Packaging

Transportation methods	40HQ container
Number of modules per cabinet	806pcs
Number of modules per pallet	31pcs+31pcs

BLUESUN SOLAR CO.,LTD

Add:1499 Zhenxing Road, Shushan District,230031 Hefei,China
 Tel:+86 (158) 5821 3997 Fax:+86 (551) 6520 3660
 E-mail:info@bluesunpv.com Http://www.bluesunpv.com

US Warehouse Location: Long Beach, CA