Model: ZJWP100A

Rated heating current 100% Ith=100A
Maximum contact voltage (inductive load)
No blowing magnetic 48V D.C.
With blowing magnetic 96V D.C.
Touch point pressure drop 100A ＜40mV
Mechanical life >300000次
Electricity life >100000次
Coil power consumption
Intermittent working system 15-21Watts
Long-term work system 9-15 Watts
Intermittent-type suction-closing voltage 60%V
Continuous-type suction and closing voltage 66%V
Release voltage 5-40%V
Touch jitter time ＜4ms
Weight : 242g
Allowable working environment:
-40℃ ~ +60℃
Allowed storage and transportation environment:
-40℃ ~ +85℃

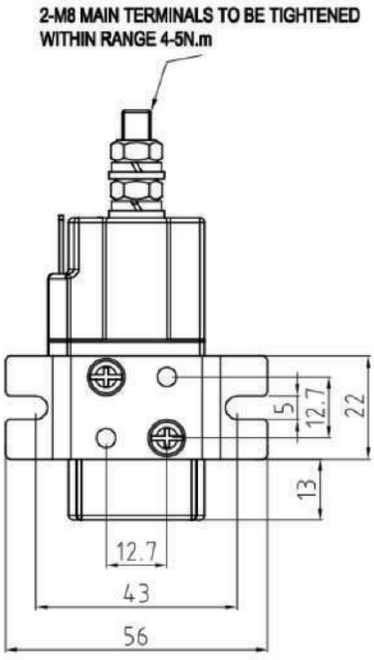

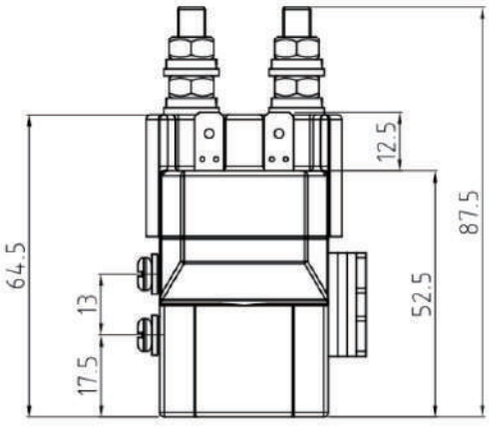
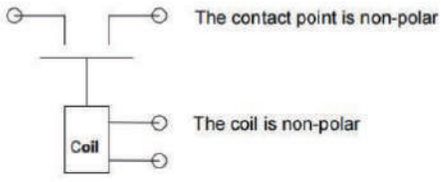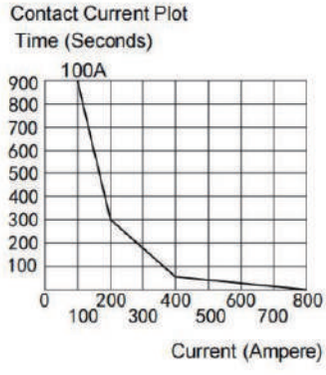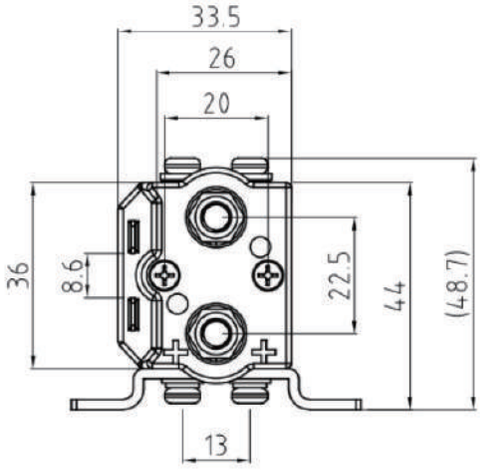
branching program